





Drawing No.	Rev.	Date	Page
BAF3528A-D2A-A-040W-BF270D1	A	2024/12/20	1/6

# APPROVAL SHEET

Part No: **BAF3528A-D2A-A-040W-BF270D1**

NOTE :

WIDE-BAND


MAKER			CUSTOMER	
				
R&D	QA	Sales	Checked	Approved
				

Prepared	Checked	Approved
Rachel Lee	Evan Chang	Kenneth Wu


Drawing No.	Rev.	Date	Page
BAF3528A-D2A-A-040W-BF270D1	A	2024/12/20	2/6


**A. Description of P/N No.**

**BAF3528A-D2A-A-040W-BF270D1**



**Description of Lot.**



**Solidlite Corp.** 

P/N : \_\_\_\_\_

Lot : \_\_\_\_\_

Date: \_\_\_\_\_ . Rank: \_\_\_\_\_ .

Q'ty : \_\_\_\_\_ . QA : \_\_\_\_\_ .

Drawing No.	Rev.	Date	Page
BAF3528A-D2A-A-040W-BF270D1	A	2024/12/20	3/6

## Applications

**Area:** Indoor use only

**Purpose:**

Plant Growing Lighting, Office Lighting, Meeting Room Lighting , Shop Lighting , Classroom Lighting, Factory Lighting ,.....

## Product Overview

※ Aluminum heat-sink base can dissipate more heat and lead to a longer life span.

## Specification

**Outline Dimension:** 490mm\*290mm\*9mm (±0.5mm)mm

**Input Voltage /Current:** DC48V/840mA

**Operating Temperature / Relative Humidity:** 0°C ~ 35°C / 20% ~ 80 %RH

**Storage Temp Range / Relative Humidity:** -20°C ~ 60°C / 20% ~ 80 %RH

## Safety warning

**Cautions:**

Keep the luminaire from falling to ground.

## Warranty

Warranty 1 year.

Within three years, should be greater than the original brightness light efficiency of 70%.

## Warnings

Don't expose this product in the high temperature and high humidity environment

## B. LED Board Data


### Absolute Maximum Ratings at $T_a=25^{\circ}\text{C}$

Parameter	Symbol	Rating	Unit
Power Dissipation	Pd	40.32	W
D.C. Forward Current	If	840	mA
Dimming & Protection Requirements	According to power supply		

Parameter	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Forward Current	If=840mA	Vf	47	48	50	V

Recommend forward current for longer duration is 840mA.  
 These values measured by Optical Spectrum Analyzer of SOLIDLITE.

### Wavelength(nm)

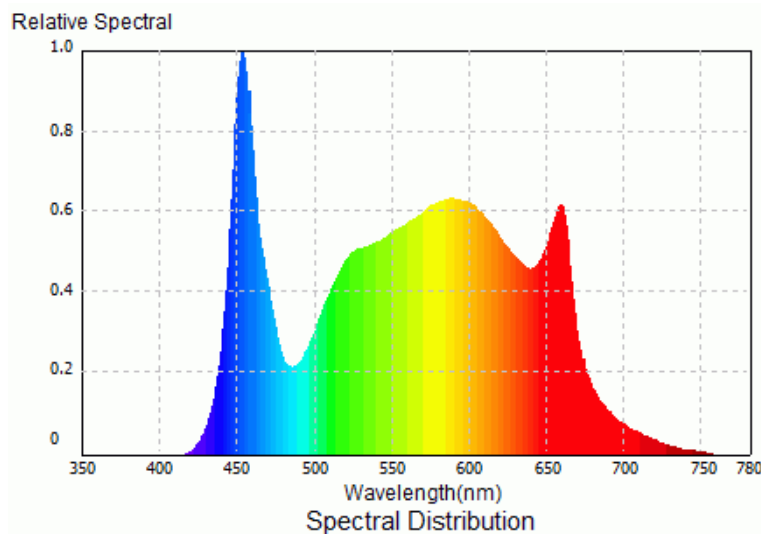


### Characteristic of light (Measurement device model : LI-COR LI-250A)

Distance(L)	PPFD@ Center( Typ.)
20cm	376
30cm	250
40cm	170
50cm	113

**PPF-Eff:2.7 $\mu\text{mol}/\text{J}$**


## LED Board Dimensions

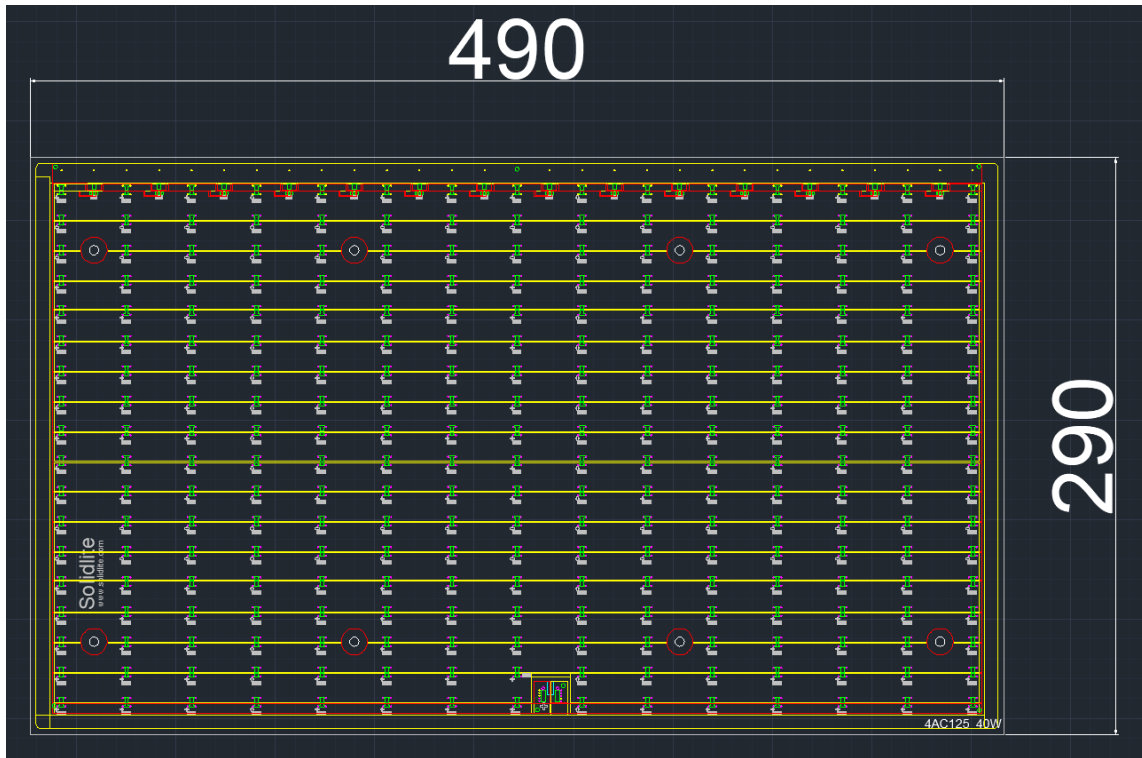

Outline Dimension & Tol. : 490mm ×290mm ×9 mm /±0.5mm


Board Thickness & Tol. : 1 mm /±0.15mm

## Typical Internal Equivalent Circuits

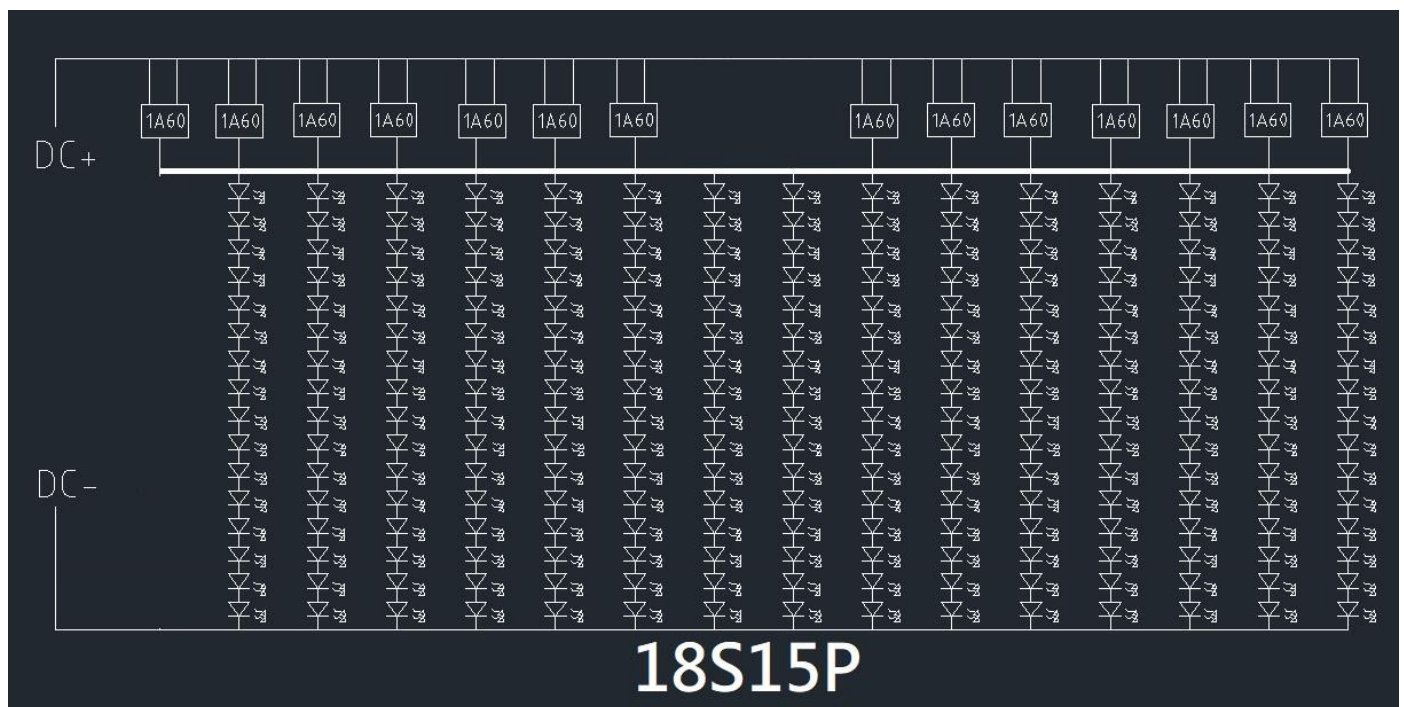

Drawing No.	Rev.	Date	Page
BAF3528A-D2A-A-040W-BF270D1	A	2024/12/20	6/6

## C. Package

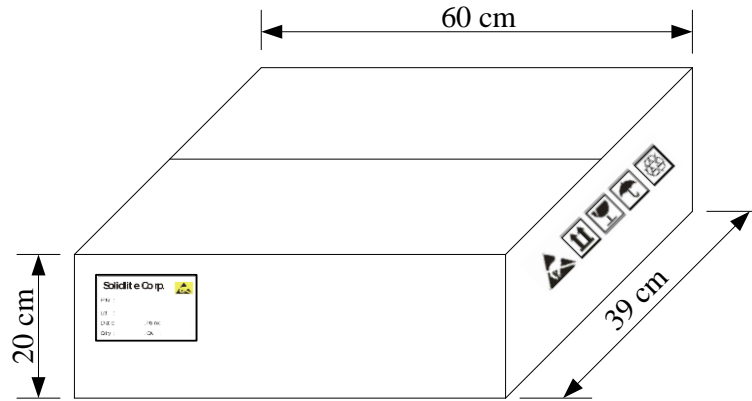

**15pcs / Big Carton      Total : 15pcs**

✘ **This product is not waterproof.**

