





Drawing No.	Rev.	Date	Page
BAF3528A-D3A-A-040W-BF270D1	B	2022/10/13	1/6

APPROVAL SHEET

Part No: **BAF3528A-D3A-A-040W-BF270D1**

NOTE :

WIDE-BAND


MAKER			CUSTOMER	
				
R&D	QA	Sales	Checked	Approved
				

Prepared	Checked	Approved
Rachel Lee	Evan Chang	Kenneth Wu


Drawing No.	Rev.	Date	Page
BAF3528A-D3A-A-040W-BF270D1	B	2022/10/13	2/6


A. Description of P/N No.

BAF3528A-D3A-A-040W-BF270D1



Description of Lot.



Solidlite Corp. 

P/N : _____

Lot : _____

Date: _____ . Rank: _____

Q'ty : _____ . QA : _____

Drawing No.	Rev.	Date	Page
BAF3528A-D3A-A-040W-BF270D1	B	2022/10/13	3/6

Applications

Area: Indoor use only

Purpose:

Plant Growing Lighting, Office Lighting, Meeting Room Lighting , Shop Lighting ,
Classroom Lighting, Factory Lighting ,.....

Product Overview

※ Aluminum heat-sink base can dissipate more heat and lead to a longer life span.

Specification

Outline Dimension: 490mm*290mm*9mm (±0.5mm)mm

Input Voltage /Current: DC48V/840mA

Operating Temperature / Relative Humidity: 0°C ~ 35°C / 20% ~ 80 %RH

Storage Temp Range / Relative Humidity: -20°C ~ 60°C / 20% ~ 80 %RH

Safety warning

Cautions:

Keep the luminaire from falling to ground.

Warranty

Warranty 1 year.

Within three years, should be greater than the original brightness light efficiency of 70%.

Warnings

Don't expose this product in the high temperature and high humidity environment

B. LED Board Data

Absolute Maximum Ratings at $T_a=25^\circ\text{C}$


Parameter	Symbol	Rating	Unit
Power Dissipation	Pd	40.32	W
D.C. Forward Current	If	840	mA
Dimming & Protection Requirements	According to power supply		

Parameter	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Forward Current	If=840mA	Vf	47	48	50	V

Recommend forward current for longer duration is 840mA.

These values measured by Optical Spectrum Analyzer of SOLIDLITE.

Wavelength(nm)

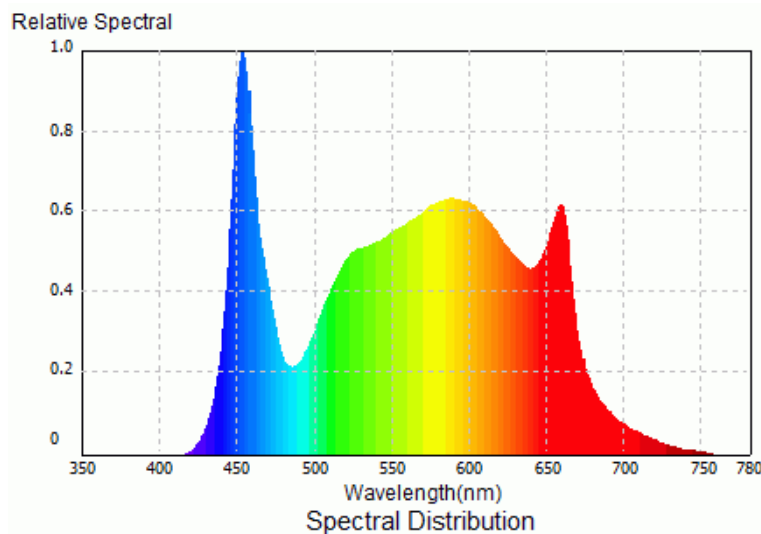


Characteristic of light (Measurement device model : LI-COR LI-250A)

Distance(L)	PPFD@ Center(Typ.)
20cm	376
30cm	250
40cm	170
50cm	113

PPF-Eff:2.7 $\mu\text{mol}/\text{J}$

LED Board Dimensions

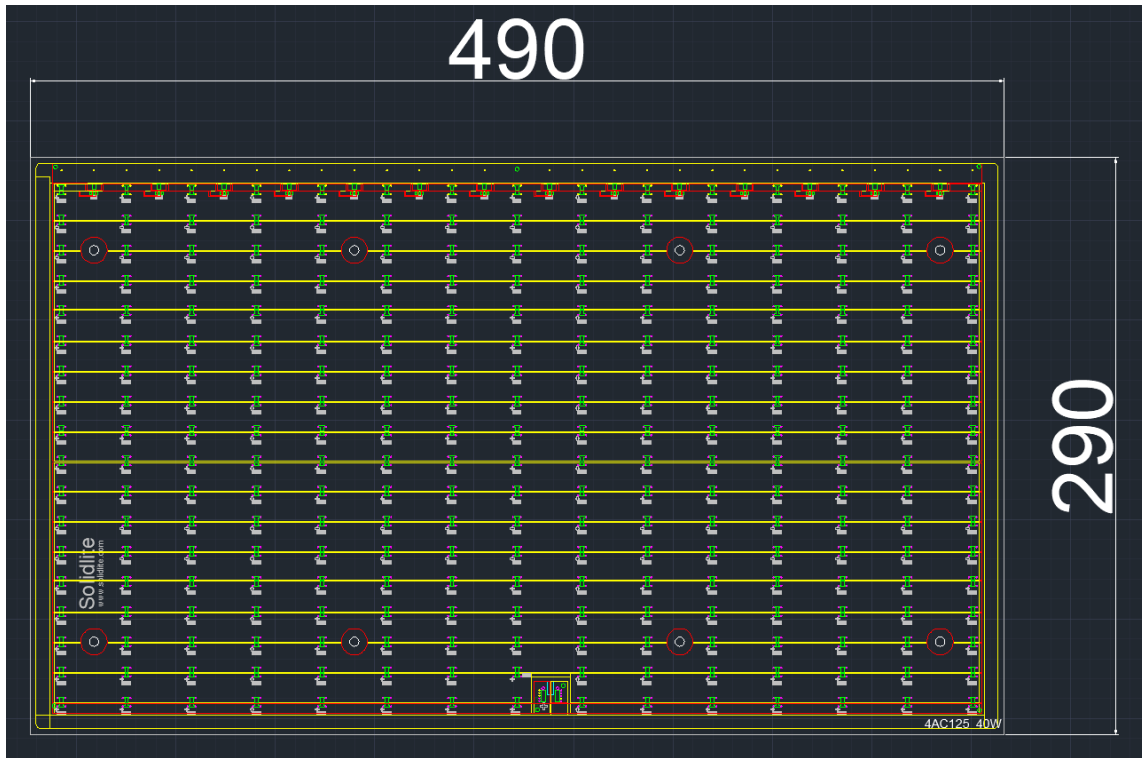

Outline Dimension & Tol. : 490mm ×290mm ×9 mm /±0.5mm


Board Thickness & Tol. : 1 mm /±0.15mm

Typical Internal Equivalent Circuits



Drawing No.	Rev.	Date	Page
BAF3528A-D3A-A-040W-BF270D1	B	2022/10/13	6/6

C. Package

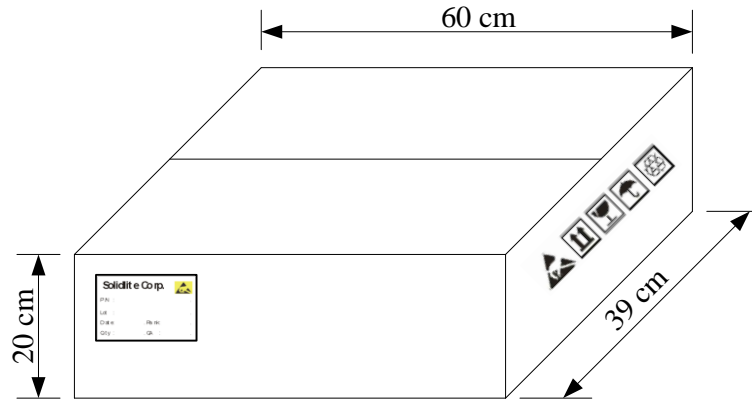

15pcs / Big Carton Total : 15pcs

※This product is not waterproof.

