APPROVAL SHEET

Part No: BF5H75G-ZIR

NOTE :

Green Part

MAKER			CUSTOMER	
SOLIDLITE				
R&D	QA	Sales	Checked	Approved

Prepared	Checked	Approved
Rachel Lee	Sky Lin	Kenneth Wu

No. 15, Sanmin S.Rd.,Fongshan Village, Hukou Township, Hsinchu County 303,Taiwan,R.O.C.

TEL:886-3-5986248 FAX:886-3-5986247 http://www.solidlite.com

LED LAMP Technical Data

DESCRIPTION:

Device Type	:	BF5H75G-ZIR
Dice Material	:	AlGaAs
Light Color	:	InfraRed 940nm
Lens Color	:	Water Clear
Lens Dimension	:	5 mm

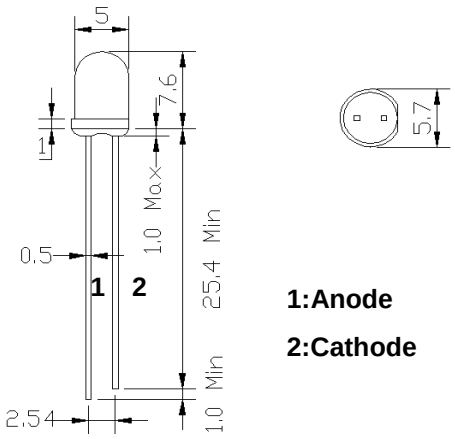

1:Anode

2:Cathode

All epoxy resin dimension are in millimeter

tolerance is ±0.2mm

Absolute Maximum Ratings at Ta=25℃

Parameter	Max.	Unit
DC Forward Current	100	mA
Reverse Voltage	5	V
Power Dissipation	200	mW
Operating Temperature	Topr：-40 ~ +80	℃
Storage Temperature	Tstr：-40 ~ +100	℃
Solder DIP (MAX. 5 seconds, 1.6mm from body) Temperature 260℃		

Electrical and Optical Characteristics at Ta=25℃

Symbol	Description	Test Condition	Min.	Typ.	Max.	Unit
V_F	Forward Voltage	I_F = 100mA	-	1.4	2.0	V
I_R	Reverse Current	V_R = 5V	-	-	10	μA
λ_P	Dom. Emission Wavelength	I_F = 100mA	-	940	-	nm
Δλ	Spectral Line Halfwidth	I_F = 100mA	-	50	-	nm
2θ□ 1/2	Viewing Angle	I_F = 100mA	-	75	-	Deg.
Po	Radiant Power	I_F = 100mA	30	40	-	mW/sr

Note: 1.The lead should be formed up to 5mm from the body of device without forming stress.

2. Soldering shall be performed after lead forming.

3. All dimensions are in millimeters

4. Suggest: the better current for this device is less than 100mA.

LED LAMP Technical Data

Typical Optical-Electrical Characteristic Curves

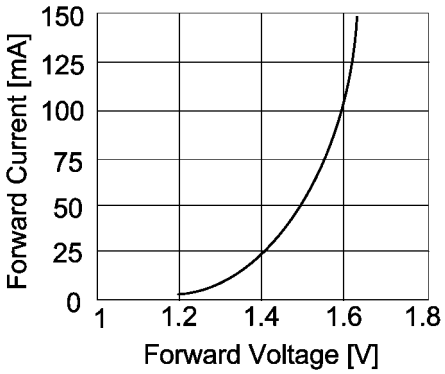

Forward Current Vs. Forward Voltage

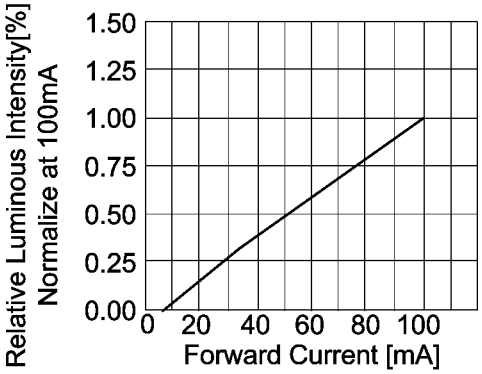

Luminous Intensity Vs. Forward Current

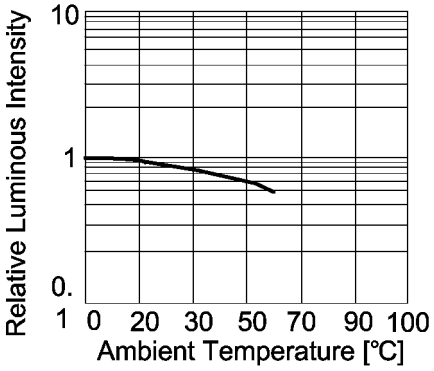

Luminous Intensity Vs. Ambient Temperature

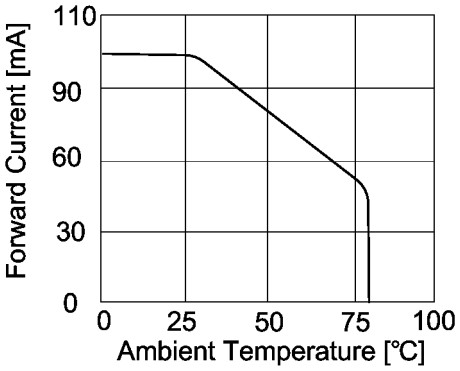

Forward Current Vs. Ambient Temperature

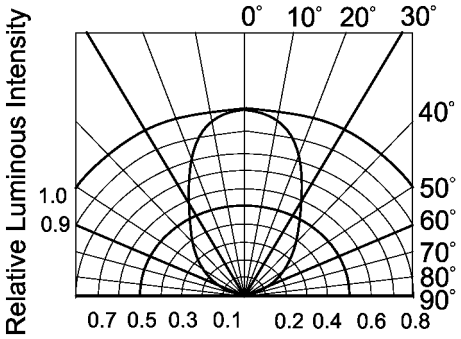

Radiation Pattern

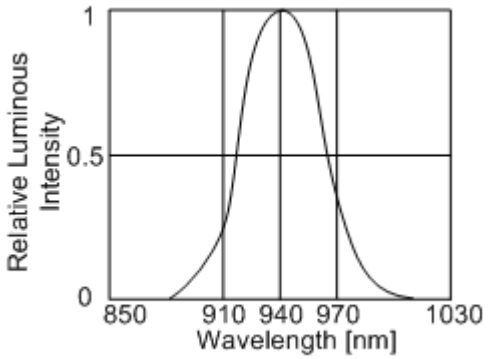

Relative Luminous Intensity Vs. Wavelength

No. 15, Sanmin S.Rd.,Fongshan Village, Hukou Township, Hsinchu County 303,Taiwan,R.O.C.

TEL:886-3-5986248 FAX:886-3-5986247 http://www.solidlite.com