


Drawing No.	Rev.	Date	Page
EL-B01L0600-DSV-D4823W	C	2019/02/18	1/9

APPROVAL SHEET

Part No: **EL-B01L0600-DSV-D4823W**

NOTE :
WIDE-BAND


MAKER			CUSTOMER	
				
R&D	QA	Sales	Checked	Approved

Prepared	Checked	Approved
Rachel Lee	Evan Chang	Kenneth Wu


Drawing No.	Rev.	Date	Page
EL-B01L0600-DSV-D4823W	C	2019/02/18	2/9


Description of P/N No.

EL - B01L0600 - DSV - D4823W

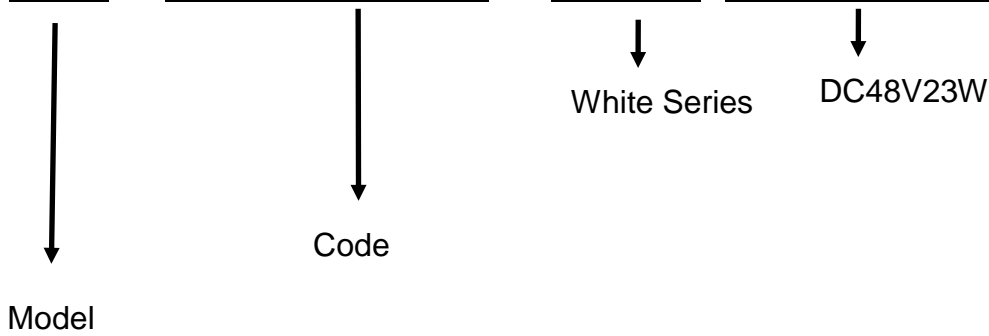

Description of Lot.

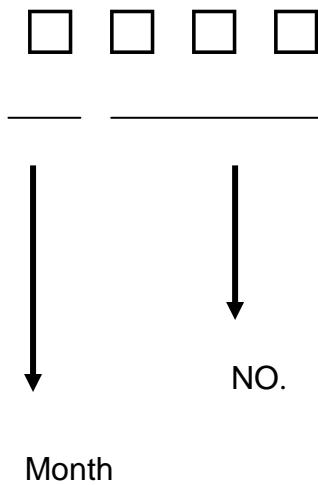

Solidlite Corp. 

P/N : _____

Lot : _____

Date: _____ . Rank: _____

Q'ty : _____ . QA : _____

Drawing No.	Rev.	Date	Page
EL-B01L0600-DSV-D4823W	C	2019/02/18	3/9

Specification for Approval

Product : LED FLAT PANEL

Part Number : EL-B01L0600-DSV-D4823W

Applications

Area: Indoor use only

Purpose:

Plant Growing Lighting , Office Lighting , Meeting Room Lighting , Shop Lighting ,
Classroom Lighting , Factory Lighting ,.....

Product Overview

※ Aluminum heat-sink base can dissipate more heat and lead to a longer life span.

Specification ※For Plant Factory use only.

※Remember not to use the device underwater.

Outline Dimension: (L) 640 (±4.5mm)mm (W) 100 (±4mm)mm (H) 15.7 (±0.3mm)mm

Input Voltage /Current : DC48V/480mA

Operating Temperature / Relative Humidity: 0°C~35°C / 20%~80%RH

(Warranty Conditions)

Storage Temp Range / Relative Humidity: -20°C ~ 60°C / 20% ~ 80 %RH

Heat-Sink Surface Temp: <60 °C

Life Expectancy of Driver : 40000hrs

Life Expectancy of LEDs :40000hrs

Safety warning

Cautions:

Don't drop the luminaire on the ground since the luminaire will be damaged

Warranty

Warranty 1years.

Should not have an adverse early.


Within one years, must be greater than the specification brightness light efficiency of 70%.



Waterproof and dust tight IP66*

***Claims and Test Results :** The claims are mainly based on results from tests conducted by SGS.(Report No.:OC-2016-300041)

Chromaticity Coordinate

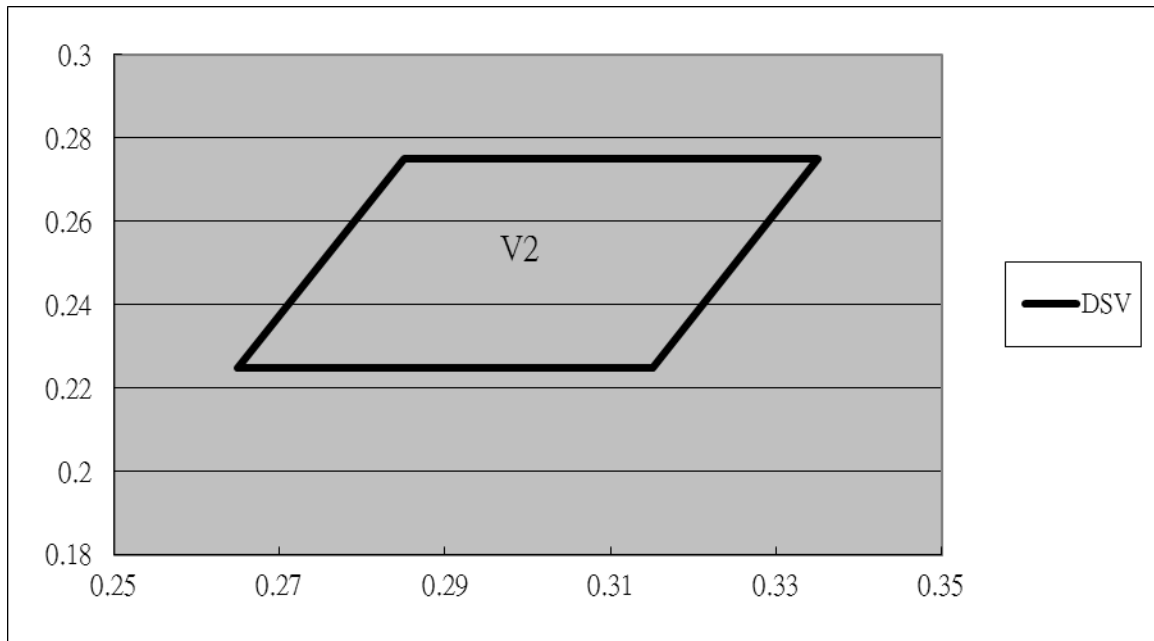

CIE X-Y :


V1---(0.265,0.225) (0.285,0.275) (0.335,275) (0.315,0.225)

Electronic Charateristic

Absolute Maximum Ratings at T_a=25°C

Item	EL-B01L0600-DSV-D4823W
LED Quantity	112pcs
DC V input	48V
DC I input	480mA
Power Dissipation	23w
Heat-Sink Spec.	Aluminum
PCB Spec.	FR4
L/W/H	640mm (±4.5mm)/100mm(±4mm)/15.7mm(±0.3mm)
Net weight	500g±200g


Product size & Photo

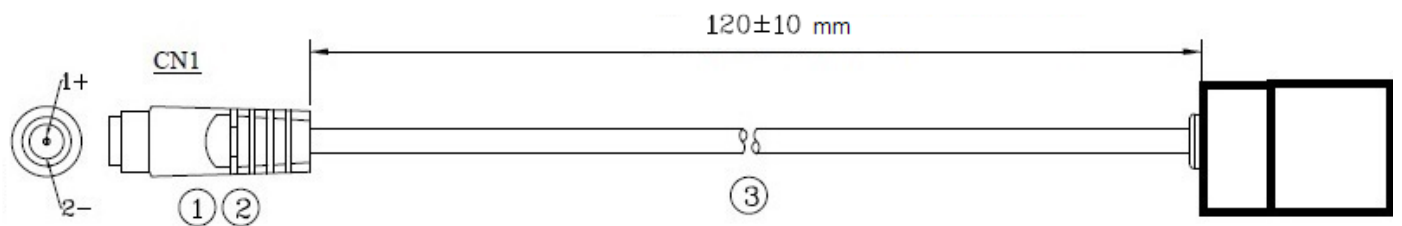

3	CABLE	UL2464#24*2C(STD) OD: 3.5mm	1	BLACK(0
2	PLASTIC	PVC45P/80°C		BLACK(0
1	DC JACK	(5.5*2.1mm)DC-0236-3	1	鍍度金泉
NO	PART NAME	PART NO	Q'TY	COLOR



Typical Internal Equivalent Circuits

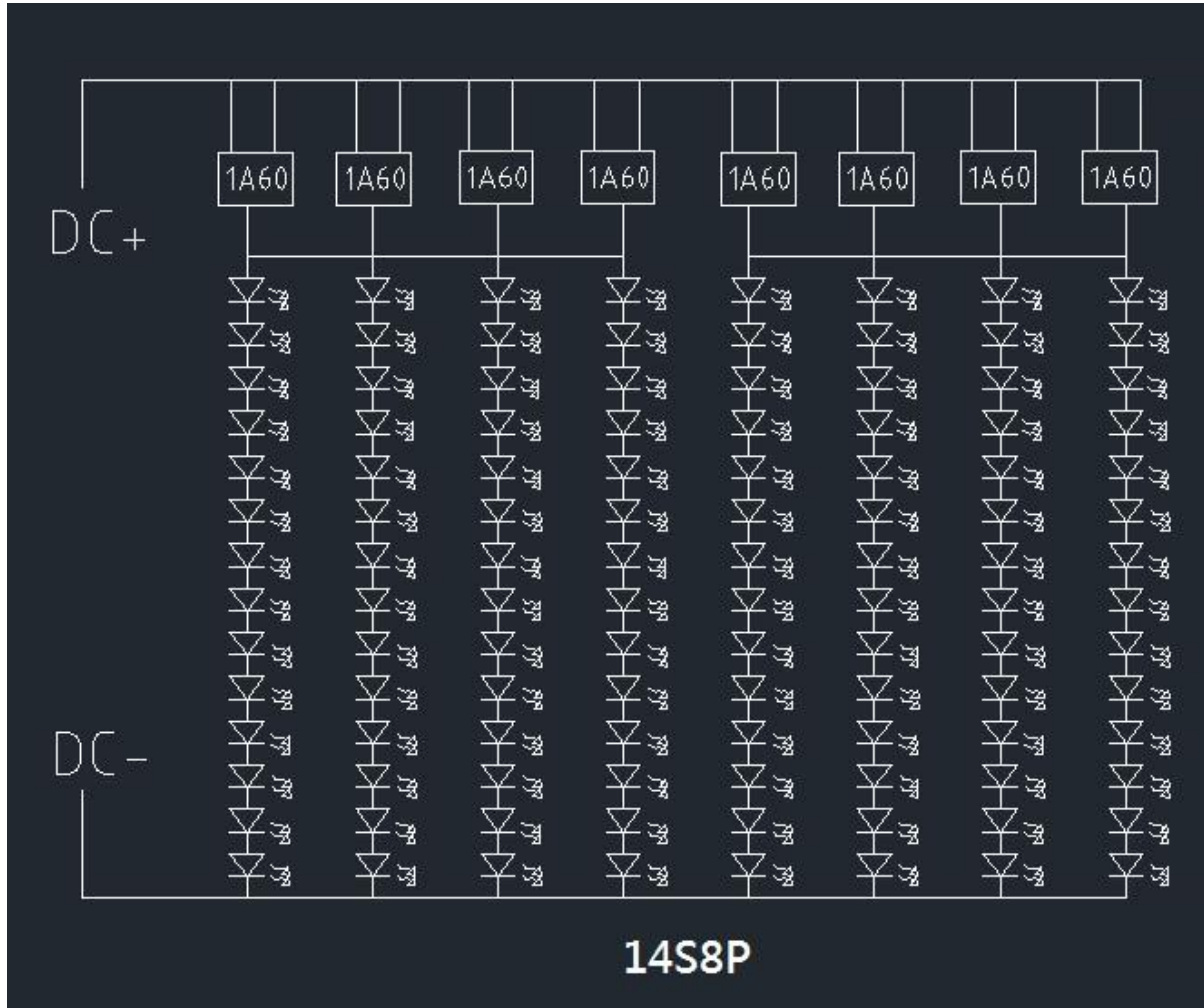


Label Format

SOLIDLITE 詮興開發科技股份有限公司	EL-B01L0600-DSV-D4823 LED Flat Panel 48V23W LED平板燈48V23W	輸入電圧: DC48V 消耗功率: 輸入電流:	1531 MADE IN TAIWAN


Optical Characteristic

Item	EL-B01L0600-DSV-D4823W
Viewing Angle	65°((±10%))
$\mu\text{Mol/s}\cdot\text{m}^2$ (The center of the amount of survey)	>180@30cm(center) (with Linear fresnel film) (Measurement device model : HD 2102.2 Made in Italy)
Light recipe	DSV
CRI	>80

Light distribution curve

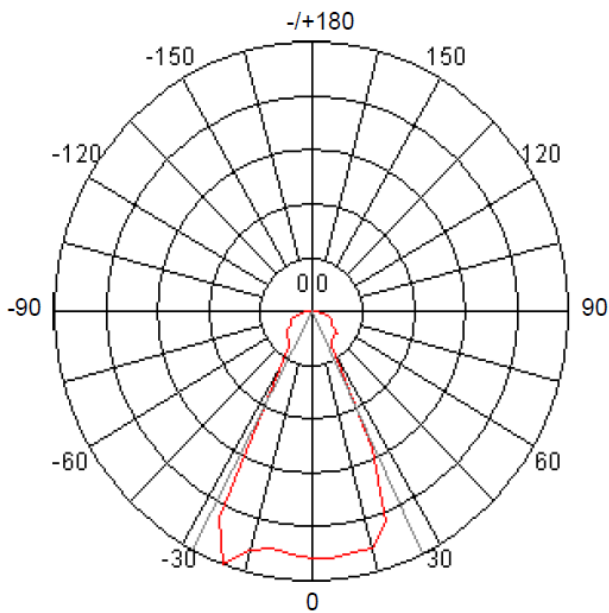

Average beam angle(50%):53.62°

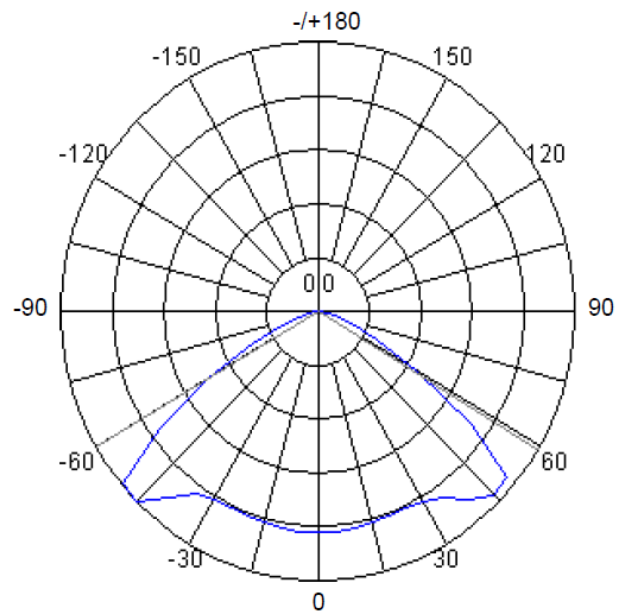


Average beam angle(50%):119.01°

Drawing No.	Rev.	Date	Page
EL-B01L0600-DSV-D4823W	C	2019/02/18	8/9

L-HOLDER 2set(4PCS)




Use the illustration:


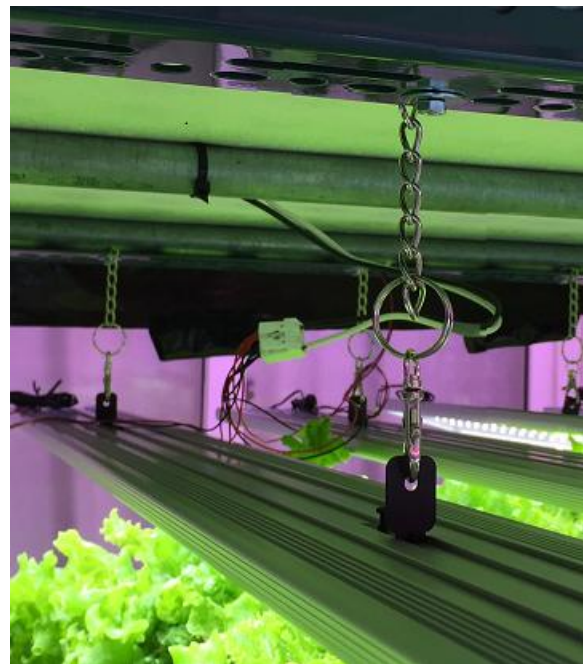


Drawing No.	Rev.	Date	Page
EL-B01L0600-DSV-D4823W	C	2019/02/18	9/9



Package information



1PCS

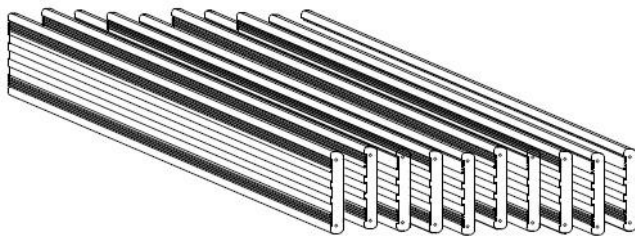

7PCS

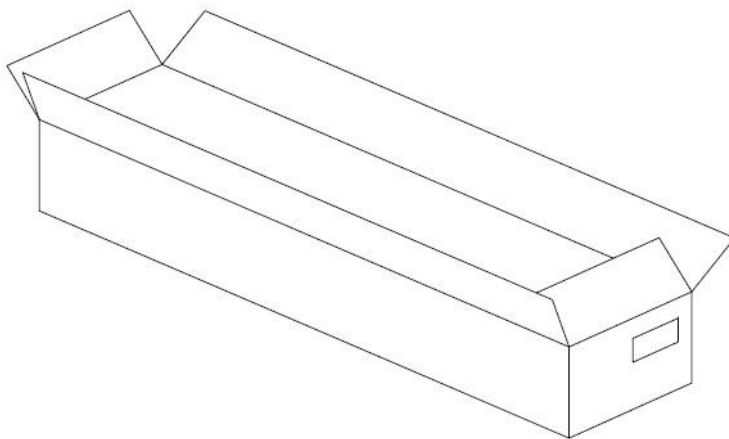

Q'ty=7PCS

L=813mm

W=202mm

H=182mm

