


Drawing No.	Rev.	Date	Page
EL-B05L1200-DSC-D4890W	C	2020/09/16	1/9





# APPROVAL SHEET

Part No: **EL-B05L1200-DSC-D4890W**

NOTE :

WIDE-BAND




MAKER			CUSTOMER	
				
R&D	QA	Sales	Checked	Approved
				

Prepared	Checked	Approved
Rachel Lee	Evan Chang	Kenneth Wu


Drawing No.	Rev.	Date	Page
EL-B05L1200-DSC-D4890W	C	2020/09/16	2/9


**Description of P/N No.**

**EL - B05L1200 - DSC - D4890W**

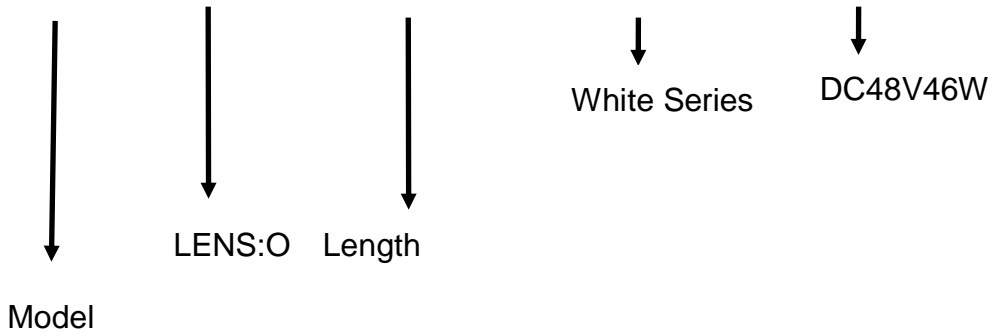

**Description of Lot.**

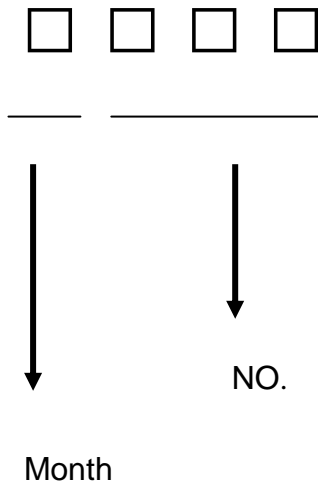

**Solidlite Corp.** 

P/N : \_\_\_\_\_

Lot : \_\_\_\_\_

Date: \_\_\_\_\_ . Rank: \_\_\_\_\_

Q'ty : \_\_\_\_\_ . QA : \_\_\_\_\_

Drawing No.	Rev.	Date	Page
EL-B05L1200-DSC-D4890W	C	2020/09/16	3/9

## Specification for Approval

**Product :** LED FLAT PANEL

**Part Number :** EL-B05L1200-DSC-D4890W

### Applications

**Area:** Indoor use only

**Purpose:**

Plant Growing Lighting ,Office Lighting , Meeting Room Lighting , Shop Lighting ,  
Classroom Lighting , Factory Lighting ,.....

### Product Overview

※ Aluminum heat-sink base can dissipate more heat and lead to a longer life span.

**Specification** ※For Plant Factory use only.

※Remember not to use the device underwater.

**Outline Dimension:** (L)1200 (±2.5mm)mm (W) 100 (±2.5mm)mm (H) 29.77 (±0.5mm)mm

**Input Voltage /Current :** DC48V/1.92A

**Operating Temperature / Relative Humidity:** 0°C~35°C / 20%~80%RH

(Warranty Conditions)

**Storage Temp Range / Relative Humidity:** -20°C ~ 60°C / 20% ~ 80 %RH

**Heat-Sink Surface Temp:** <60 °C

**Life Expectancy of Driver :** 40000hrs

**Life Expectancy of LEDs :**40000hrs

### Safety warning

**Cautions:**

Don't drop the luminaire on the ground since the luminaire will be damaged

Don't expose this product at the high temperature and high humidity environment

### Warranty

Warranty 1years.

Should not have an adverse early.


Within 1 years, must be greater than the original brightness light efficiency of 80%.



**Waterproof and dust tight IP66\***

**\*Claims and Test Results:**The claims are mainly based on results from tests conducted by SGS.(Report No.:OC-2016-300041)

## Chromaticity Coordinate

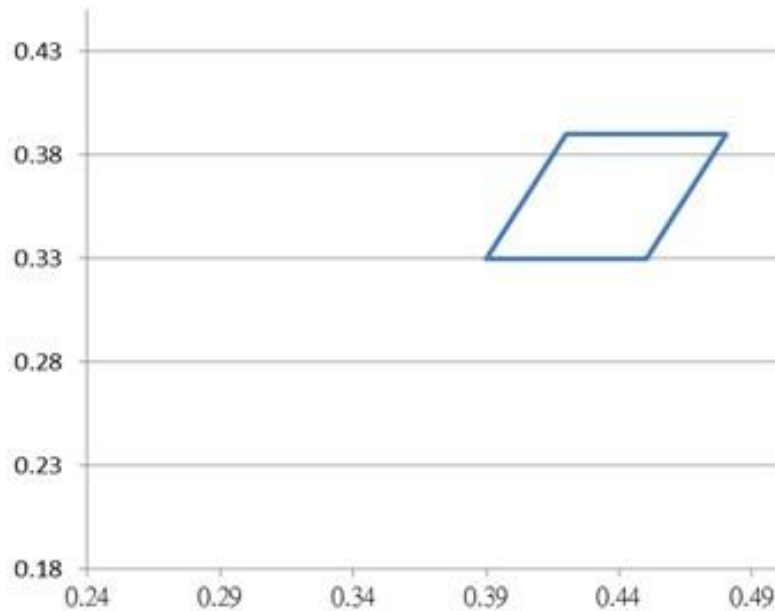

CIE X./Y : DSC --- (0.39, 0.33) (0.42, 0.39) (0.48, 0.39) (0.45, 0.33)

## Electronic Characteristic

### Absolute Maximum Ratings at T<sub>a</sub>=25°C


Item	EL-B05L1200-DSC-D4890W
LED Quantity	504pcs
DC V input	47~50V
DC I input	1.92A±5%
Power Dissipation	92w±5%
Heat-Sink Spec.	Aluminum
PCB Spec.	MCPCB
L/W/H	1200mm (±2.5mm)/100mm(±2.5mm)/29.77mm(±0.5mm)
Net weight	1500g±70g

Drawing No.	Rev.	Date	Page
EL-B05L1200-DSC-D4890W	C	2020/09/16	5/9


**Product size & Photo**



**Cable size**

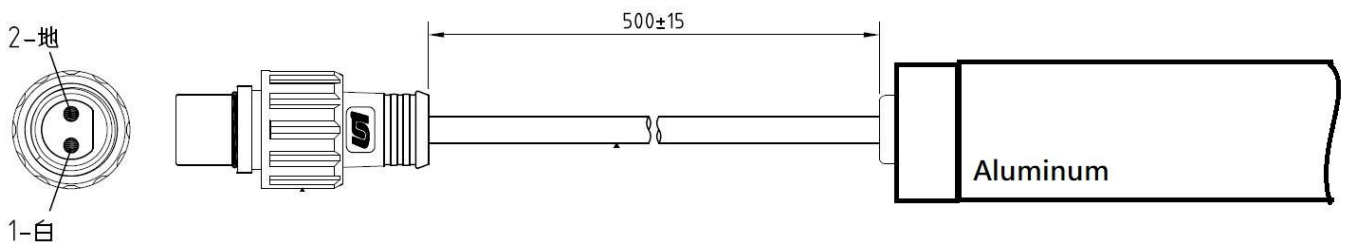


**FLAT PANEL Photo**

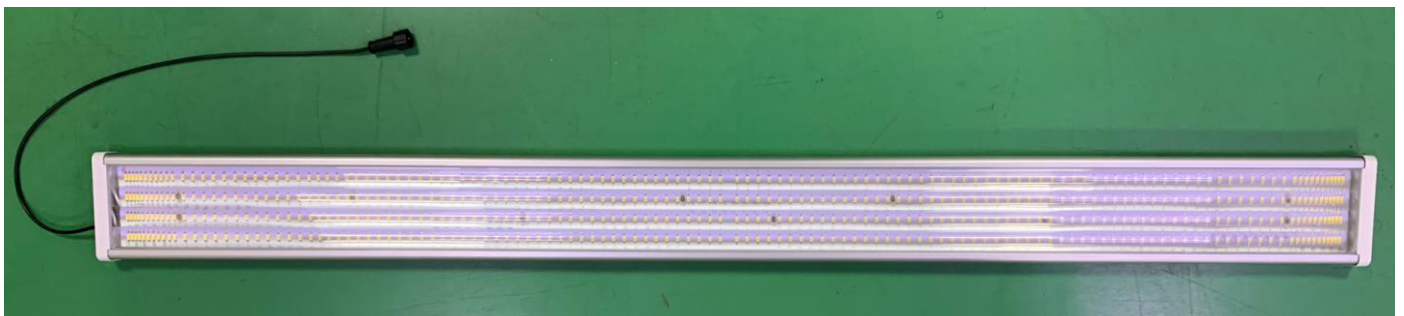

Drawing No.	Rev.	Date	Page
EL-B05L1200-DSC-D4890W	C	2020/09/16	6/9


## Typical Internal Equivalent Circuits

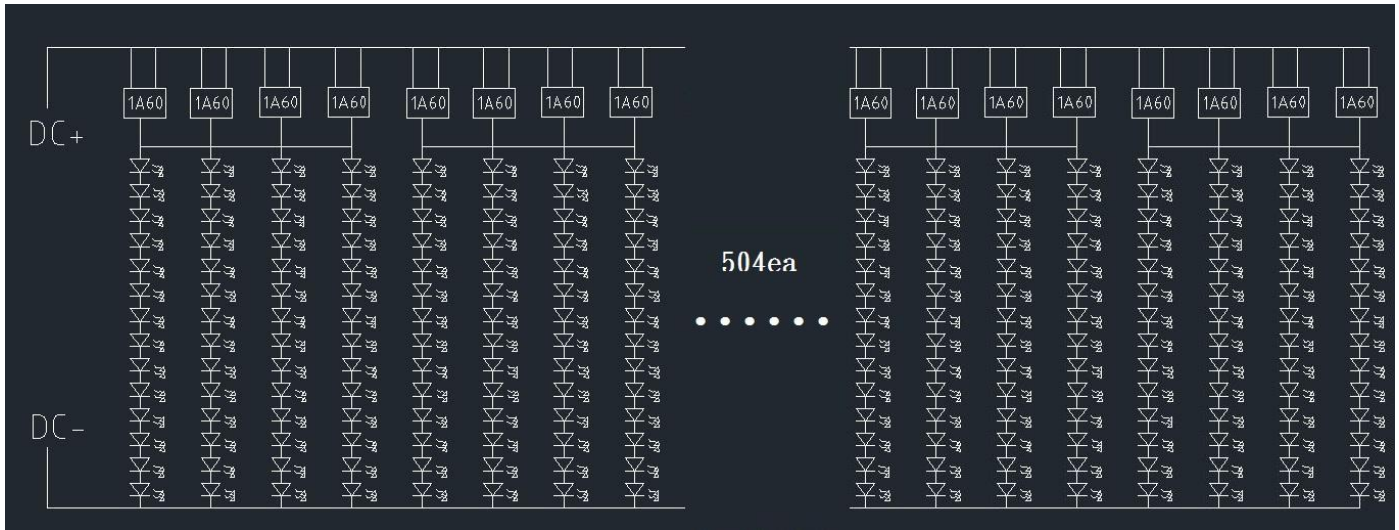

## Label Format




## Label Location:

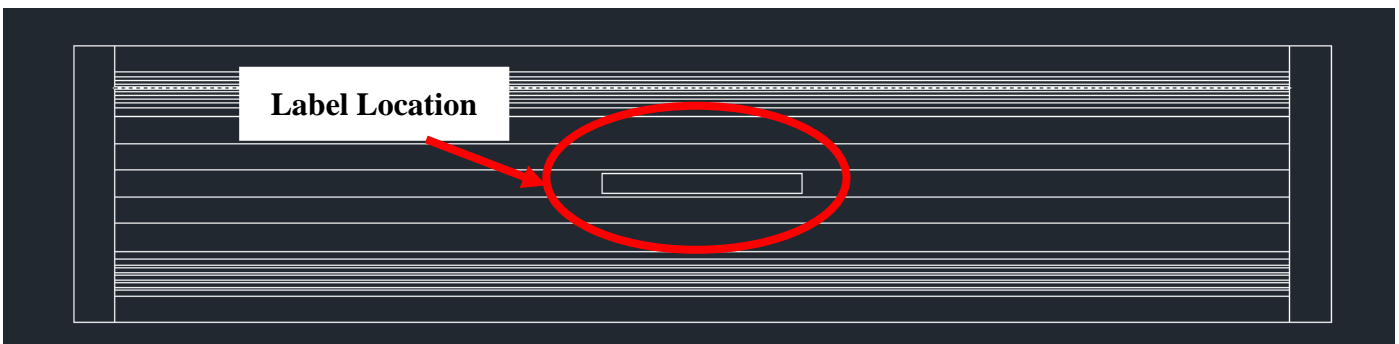


## Optical Characteristic

Item	EL-B05L1200-DSC-D4890W
Viewing Angle	54°(W) ±5° / 120°(L) ±5°
$\mu\text{Mol/s}\cdot\text{m}^2$ (The center of the amount of survey)	>350@30cm(center) (contain Linear fresnel film) (Measurement device model : HD 2102.2 Made in Italy)
Light recipe	DSC
Dimming	According to power supply

## Light distribution curve

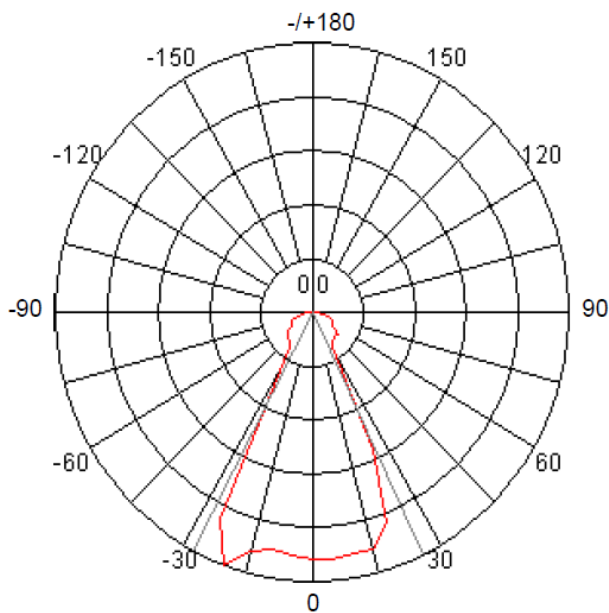



**Average beam angle(50%):53.62°**

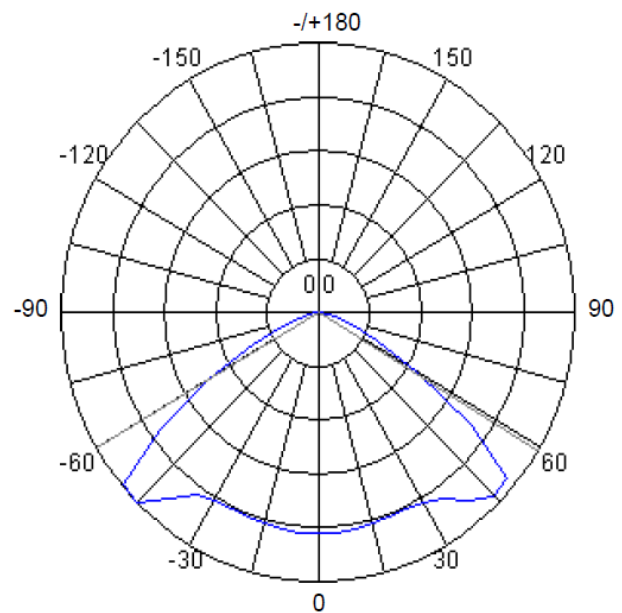

**Average beam angle(50%):119.01°**

Drawing No.	Rev.	Date	Page
EL-B05L1200-DSC-D4890W	C	2020/09/16	8/9

Package information

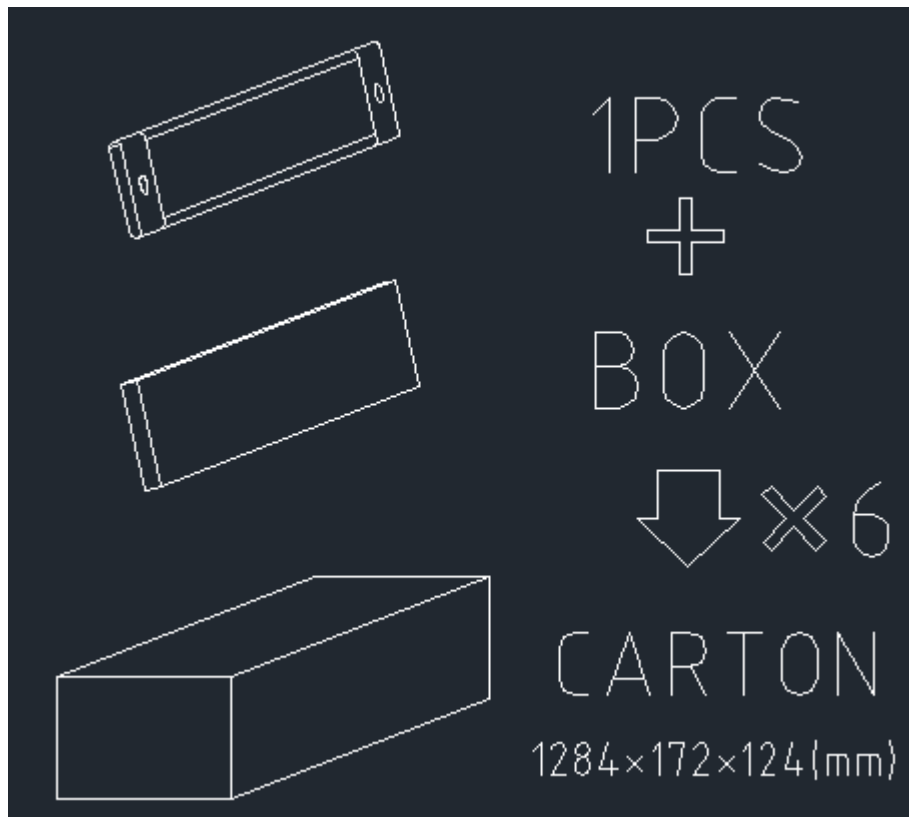



Drawing No.	Rev.	Date	Page
EL-B05L1200-DSC-D4890W	C	2020/09/16	9/9

**Fitting Part**

**L-HOLDER 2set(4PCS)**



**Use the illustration:**

