







Drawing No.	Rev.	Date	Page
HL3528A-DSM-040W-BF270ZA	A	2019/04/11	1/7

# APPROVAL SHEET

Part No: **HL3528A-DSM-040W-BF270ZA**

NOTE :

WIDE-BAND 

MAKER			CUSTOMER	
				
R&D	QA	Sales	Checked	Approved
				


Prepared	Checked	Approved
Rachel Lee	Evan Chang	Kenneth Wu




Drawing No.	Rev.	Date	Page
HL3528A-DSM-040W-BF270ZA	A	2019/04/11	2/7


**A. Description of P/N No.**

**HL3528A-D SM-040W-BF224Z9**

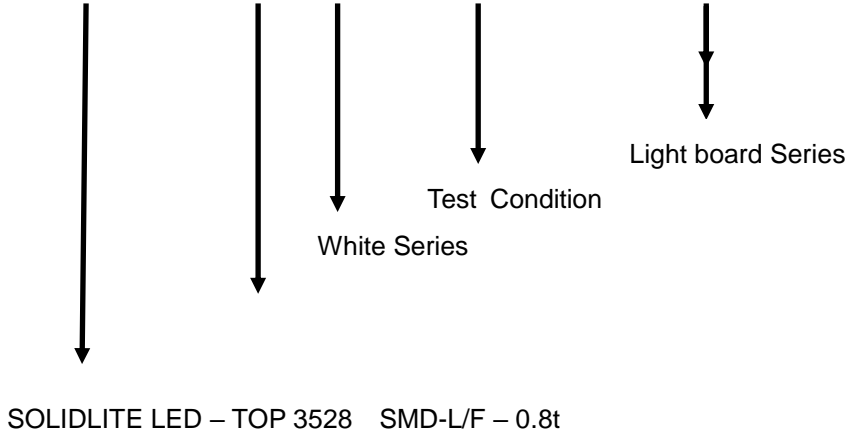

**Description of Lot.**

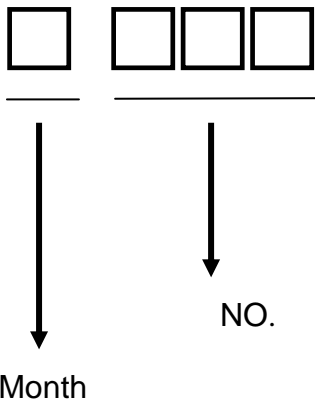

**Solidlite Corp.** 

P/N : \_\_\_\_\_

Lot : \_\_\_\_\_

Date: \_\_\_\_\_ . Rank: \_\_\_\_\_

Q'ty : \_\_\_\_\_ . QA : \_\_\_\_\_

Drawing No.	Rev.	Date	Page
HL3528A-DSM-040W-BF270ZA	A	2019/04/11	3/7

## Applications

**Area:** Indoor use only

**Purpose:**

Plant Growing Lighting, Office Lighting, Meeting Room Lighting , Shop Lighting , Classroom Lighting, Factory Lighting ,.....

## Product Overview

※ Aluminum heat-sink base can dissipate more heat and lead to a longer life span.

## Specification

**Outline Dimension:** 490mm\*290mm\*9mm (±0.5mm)mm

**Input Voltage /Current:** DC48V/840mA

**Operating Temperature / Relative Humidity:** 0°C ~ 35°C / 20% ~ 80 %RH

**Storage Temp Range / Relative Humidity:** -20°C ~ 60°C / 20% ~ 80 %RH

## Safety warning

**Cautions:**

Keep the luminaire from falling to ground.

## Warranty

Warranty 1 year.

Within one years, should be greater than the original brightness light efficiency of 85%.

## Warnings

Don't expose this product in the high temperature and high humidity environment

## B. LED Board Data

### Absolute Maximum Ratings at $T_a=25^\circ\text{C}$


Parameter	Symbol	Rating	Unit
Power Dissipaion	Pd	44.4	W
D.C. Forward Current	If	924	mA
Dimming & Protection Requirements	According to power supply		

Parameter	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Forward Current	If=840mA	Vf	47	48	50	V

Recommend forward current for longer duration is 840mA.  
 These values measured by Optical Spectrum Analyzer of SOLIDLITE.

### Characteristic of light (Measurement device model : DELTA HD 2102.2)

LED BOARD ×4

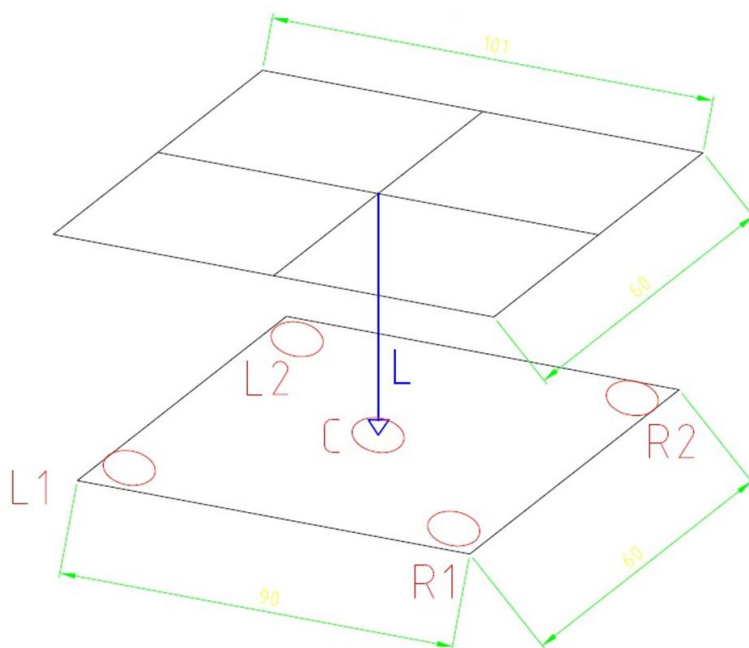


Distance(L)	Center( Typ.)
20cm	269
25cm	243
30cm	201
35cm	157
40cm	135

Unit:  $\mu\text{mol}/\text{m}^2/\text{s}$

Drawing No.	Rev.	Date	Page
HL3528A-DSM-040W-BF270ZA	A	2019/04/11	5/7

## Chromaticity Coordinate

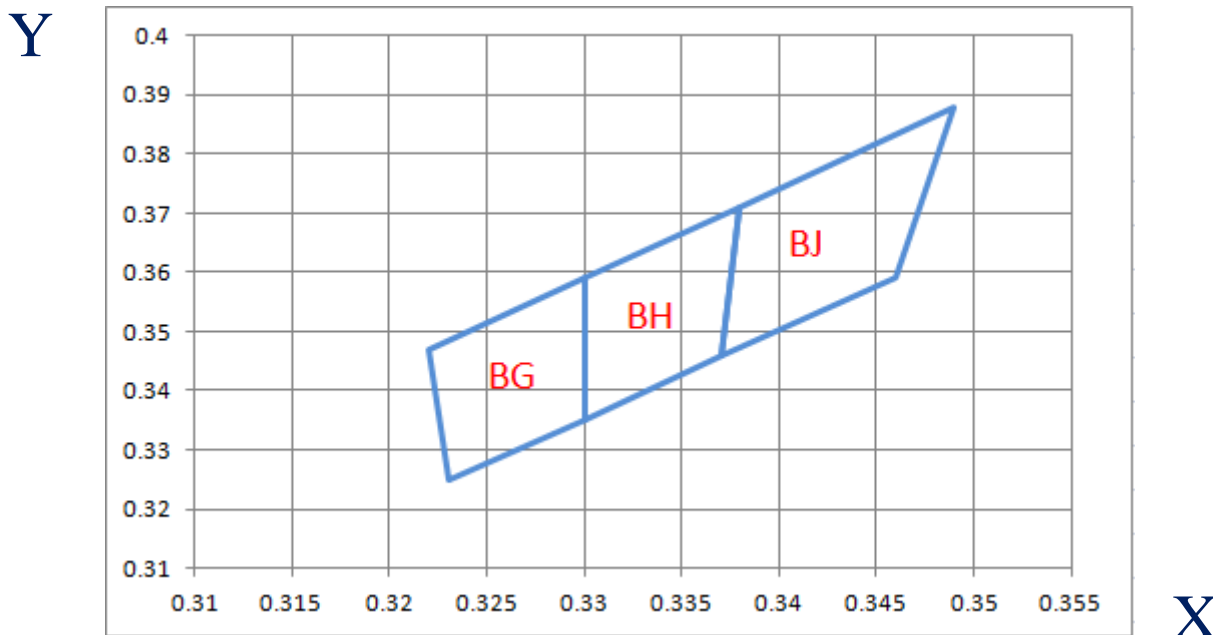

### CIE X-Y:

BG --- (0.322,0.347) (0.330,0.359) (0.330,0.335) (0.323,0.325)

BH --- (0.330,0.359) (0.338,0.371) (0.337,0.346) (0.330,0.335)

BJ --- (0.338,0.371) (0.349,0.388) (0.346,0.359) (0.337,0.346)

Drawing No.	Rev.	Date	Page
HL3528A-DSM-040W-BF270ZA	A	2019/04/11	6/7


## LED Board Dimensions



Outline Dimension & Tol. : 569.6mm x345mm x9 mm /±0.5mm


Board Thickness & Tol. : 1 mm /±0.15mm

## Typical Internal Equivalent Circuits

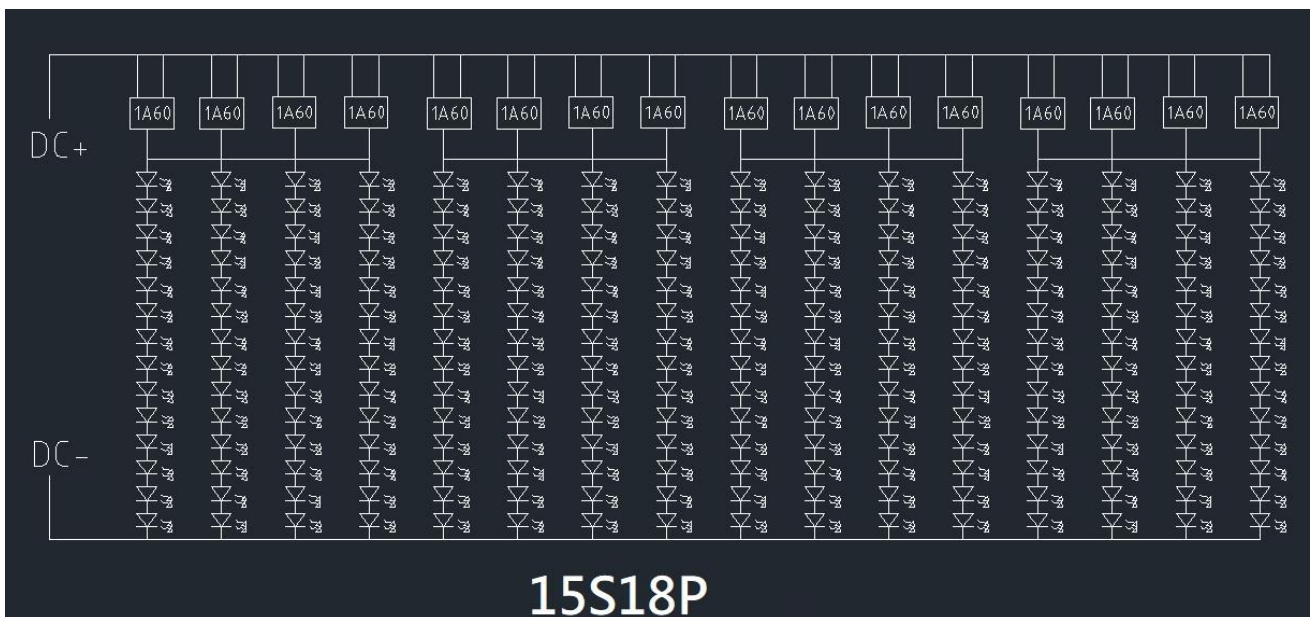

Drawing No.	Rev.	Date	Page
HL3528A-DSM-040W-BF270ZA	A	2019/04/11	7/7

### C. Package

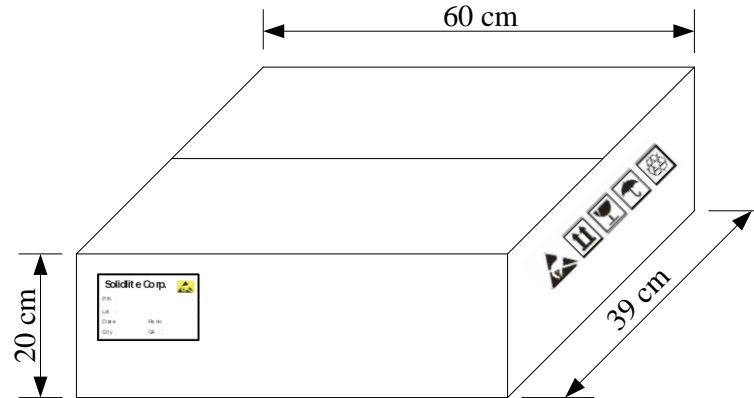

**15pcs / Big Carton      Total : 15pcs**

✘ **This product is not waterproof.**

