





Drawing No.	Rev.	Date	Page
HL3528A-DSB-040W-BF270ZA	A	2019/04/11	1/7

APPROVAL SHEET

Part No: **HL3528A-DSB-040W-BF270ZA**

NOTE :

WIDE-BAND


MAKER			CUSTOMER	
				
R&D	QA	Sales	Checked	Approved
				


Prepared	Checked	Approved
Rachel Lee	Evan Chang	Kenneth Wu




Drawing No.	Rev.	Date	Page
HL3528A-DSB-040W-BF270ZA	A	2019/04/11	2/7


A. Description of P/N No.

HL3528A-DSB-040W-BF270ZA

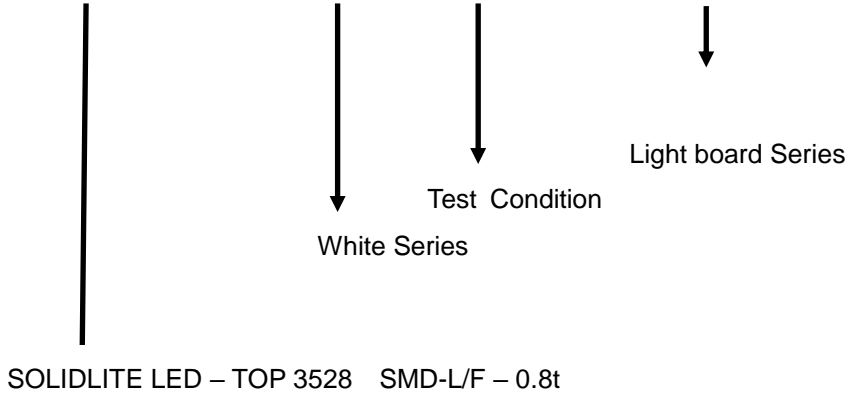

Description of Lot.

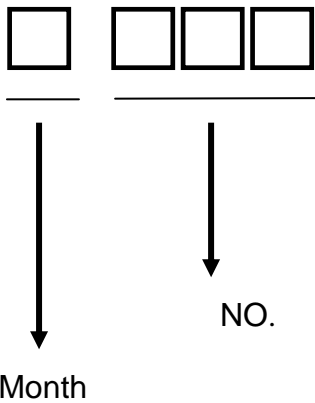

Solidlite Corp. 

P/N : _____

Lot : _____

Date: _____ . Rank: _____

Q'ty : _____ . QA : _____

Drawing No.	Rev.	Date	Page
HL3528A-DSB-040W-BF270ZA	A	2019/04/11	3/7

Applications

Area: Indoor use only

Purpose:

Plant Growing Lighting, Office Lighting, Meeting Room Lighting , Shop Lighting ,
Classroom Lighting, Factory Lighting ,.....

Product Overview

※ Aluminum heat-sink base can dissipate more heat and lead to a longer life span.

Specification

Outline Dimension: 569.6mm*345mm*9mm (±0.5mm)mm

Input Voltage /Current: DC48V/840mA

Operating Temperature / Relative Humidity: 0°C ~ 35°C / 20% ~ 80 %RH

Storage Temp Range / Relative Humidity: -20°C ~ 60°C / 20% ~ 80 %RH

Safety warning

Cautions:

Keep the luminaire from falling to ground.

Warranty

Warranty 1year.Should not have an adverse early.

Within one years, must be greater than the specification brightness light efficiency of 85%.

Warnings

Don't expose this product in the high temperature and high humidity environment

B. LED Board Data

Absolute Maximum Ratings at $T_a=25^{\circ}\text{C}$


Parameter	Symbol	Rating	Unit
Power Dissipaion	Pd	44.4	W
D.C. Forward Current	If	924	mA
Dimming & Protection Requirements	According to power supply		

Parameter	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Forward Current	If=840mA	Vf	47	48	50	V

Recommend forward current for longer duration is 840mA.
 These values measured by Optical Spectrum Analyzer of SOLIDLITE.

Characteristic of light (Measurement device model : DELTA HD 2102.2)

LED BOARD ×4

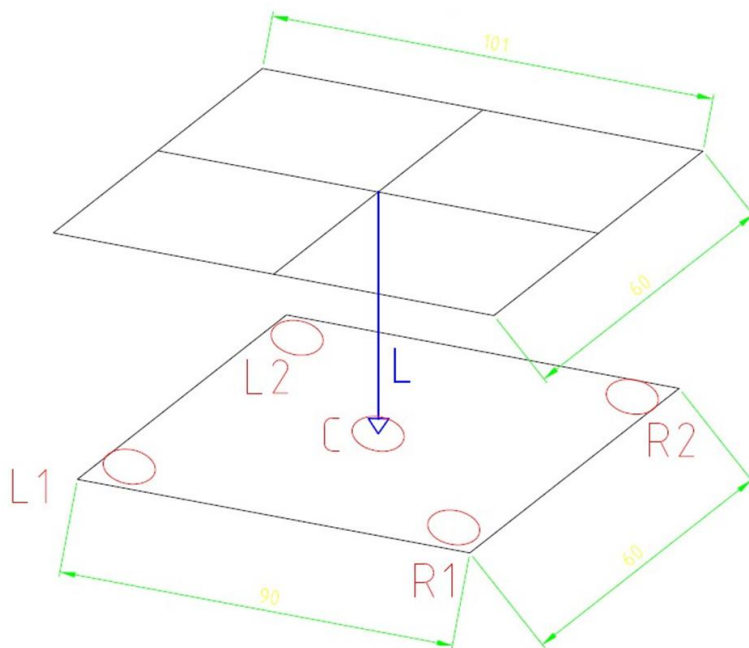


Distance(L)	Center(Typ.)
20cm	283
25cm	262
30cm	213
35cm	178
40cm	149

Unit:umol/m²/s

Drawing No.	Rev.	Date	Page
HL3528A-DSB-040W-BF270ZA	A	2019/04/11	5/7

Chromaticity Coordinate

Y

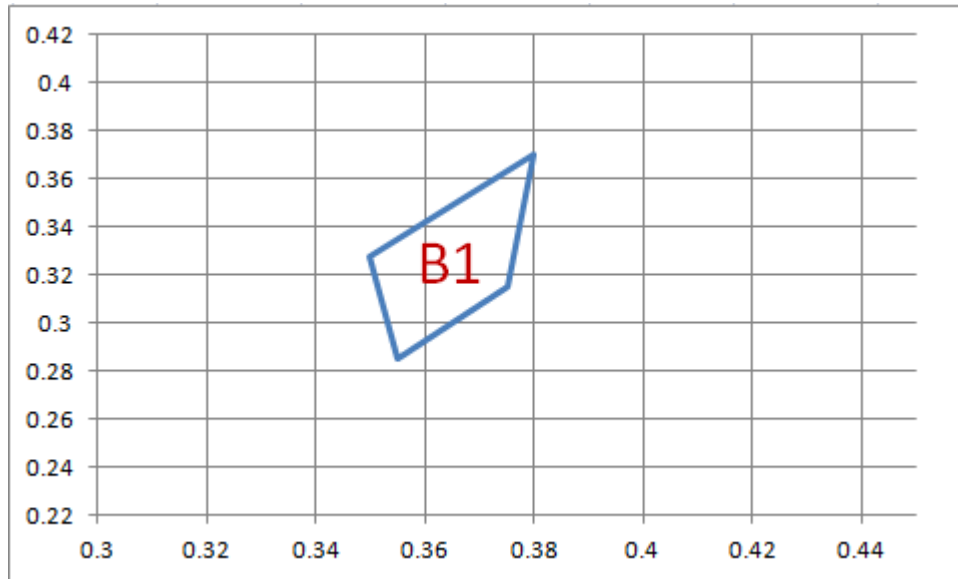

X

CIE X./Y :

B1 --- (0.350, 0.328) (0.380, 0.370) (0.375, 0.315) (0.355, 0.285)


LED Board Dimensions



Outline Dimension & Tol. : 569.6mm ×345mm ×9 mm /±0.5mm


Board Thickness & Tol. : 1 mm /±0.15mm

Typical Internal Equivalent Circuits

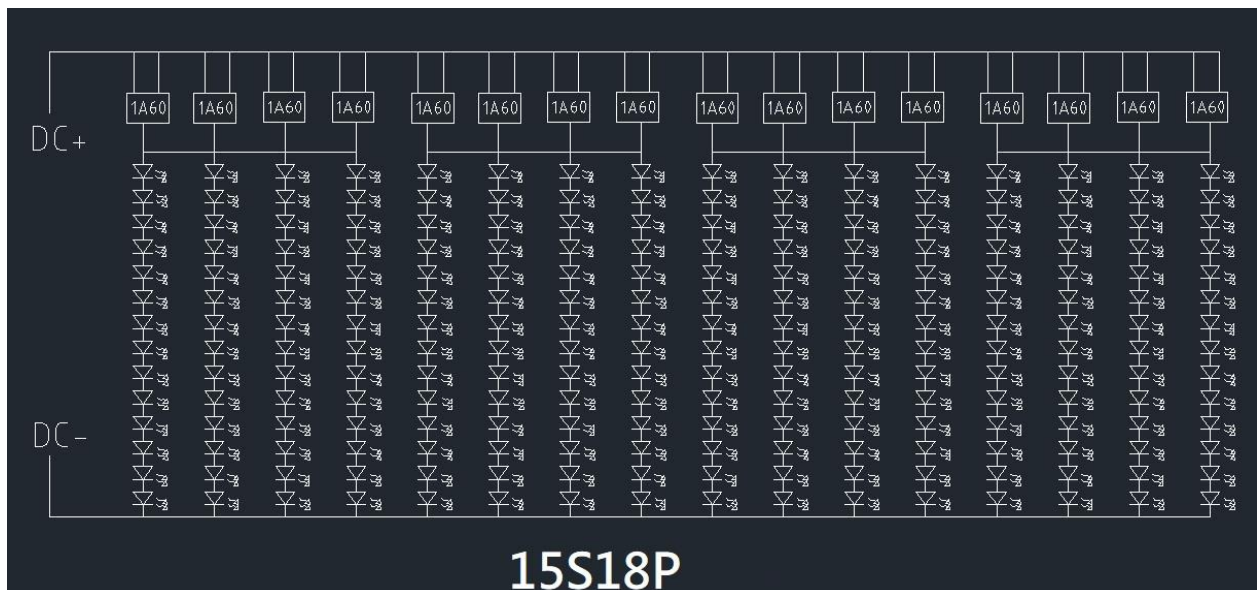

Drawing No.	Rev.	Date	Page
HL3528A-DSB-040W-BF270ZA	A	2019/04/11	7/7

C. Package

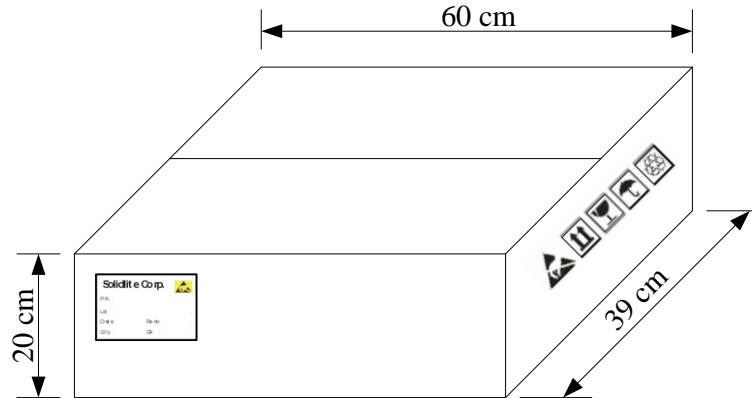

15pcs / Big Carton Total : 15pcs

✘ **This product is not waterproof.**

